

DEPALLETISER UNI701

Semiautomatic machine for bottle and jar depalletising, featuring low-level discharge and pallet on the floor




Consisting of:

- Double-column structure for layer loading/unloading platform lifting
- Discharge platform with plane made of Lignostone and layer-holding fixed guides
- Layer-pushing bar with gear motor controlled by frequency converter
- 2 Layer-pad grip pincers units
- Perimetric safety fences as per CE regulations
- Electric installation as per CE regulations

OPTIONAL

- Photoelectric barrier
- Retracting guide
- Front holding guide for unstable containers
- Discharge accumulation table
- Container aligner at discharge

DEPALLETISER UNI701

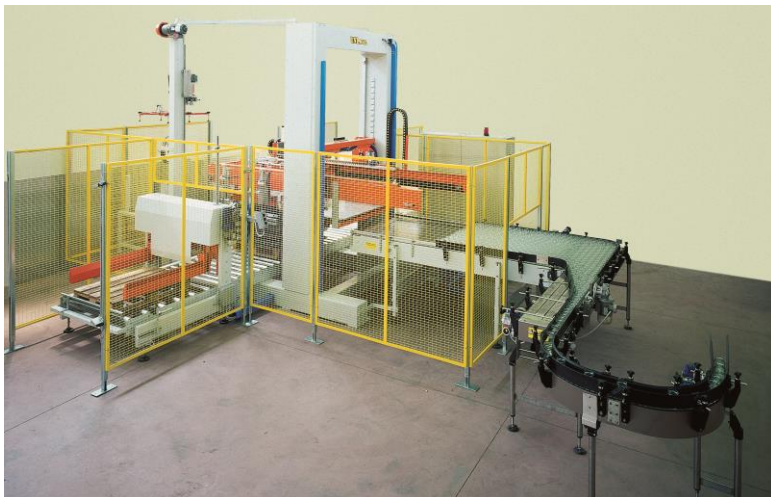

APPROX. TECHNICAL DATA

- Pallet dimensions : 800x1200mm / 1000x1200mm
- Containers : jars e bottles
- Max pallet height : 1800mm
- Operation speed : 2 layers/min



*This technical sheet gives an approximate description of the machine.
The technical features and the machine configuration are to be confirmed at the
time of order.*

UNIMAC-GHERRI SRL

-

Strada Barco 4/G - 42027 Montecchio Emilia (RE) ITALY

-

Tel. +39 0522 863046 - Fax +39 0522 864211 E-mail: info@uni-mac.com www.unimac-gherri.com